

Generating power with pleasure

# SEA WASP



Proudly built in  
Australia



## 4.0 K.V.A. Model SW. 3200

### Electrical Output

4.0 K.V.A. (3.2K.W. @ 0.8 Power Factor).

### Speed

3000 R.P.M. - 50Hz

### Voltage Connection

Single (1) Phase, 240 Volt - 50Hz.

### Generator Design

Brushless, drip proof construction, 2 pole revolving field, class 'F' Insulation.


### Build Specifications

C.E.I. 2-3, I.E.C. 34.1, U.D.E. 0530, BS 4999.

<b>Generator Output</b>	4.0 K.V.A. (3.2 K.W.)	<b>H.P. Continuous (DIN)</b>	6.0 H.P. @25°C
<b>Generator Model</b>	6.5 K.V.A. Brushless	<b>H.P. Standby</b>	6.9 H.P. @25°C
<b>Engine Model</b>	Farymann 18W	<b>Governing</b>	Mechanical Flyweight
<b>Engine Type</b>	Water Cooled 4 Cycle Diesel	<b>Cooling System</b>	Raw Water Cooled
<b>No. of Cylinders</b>	One (1)	<b>Starting System</b>	Electrical 12V 1.4 K.W.
<b>Bore and Stroke</b>	82 x 55mm	<b>Battery Charging</b>	12V, 750Watt
<b>Total Displacement</b>	290 C.C.	<b>Lub. Oil Capacity</b>	1.01Litres
<b>Full Load Speed</b>	3000 R.P.M.	<b>Fuel Consumption</b>	220g./H.P./h.r.
<b>Fuel Injection Pump</b>	Bosch Direct	<b>Noise Levels (Silenced)</b>	65 dBA @ 5 metres
<b>Operating Angle</b>	20°C in any direction (cont.)		

## standard features

- 1 Raw water cooled, Diesel engine.
- 2 Wet exhaust (standard).
- 3 3mm thick zinc steel tray base,
- 4 Anti-vibration mounts (4) fitted.
- 5 12 volt battery charging alternator.
- 6 12 volt D.C. control circuit breaker.
- 7 A.C. load circuit breaker.
- 8 Sump oil pump fitted.
- 9 Engine hours run meter.
- 10 Fuel filter.
- 11 Fuel lift pump (60cms lift).
- 12 High water temperature shutdown.
- 13 Low engine oil pressure shutdown.
- 14 Remote mounting starting module.

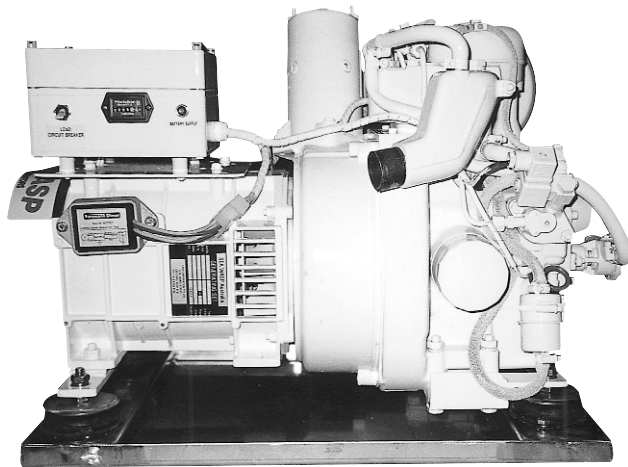

## optional equipment

- 1 Below waterline anti-syphon installation kit.
- 2 Water lock muffler.
- 3 12 volt D.C. electric fuel pump.



## Dimensions

Model	Length L (mm)	Width W (mm)	Height H (mm)	Weight Kg (wet)
SW3200 (4 K.V.A.)				
Open Model	730	390	460	85
Silenced Model	820	490	560	97

Distributed by:

Manufactured by:

**Sea Wasp Australia**

PO Box 863, Wynnum Qld 4178  
Phone: (07) 3907 0708 Fax: (07) 3907 0709  
[www.seawasp.com.au](http://www.seawasp.com.au)

All dimensions, parameters & performances subject to change without further notice.